

berelli.

berelli.com


DORELLE 30

BY berelli.

PART OF THE ORVELLA

ARCHITECTURAL COLLECTION

BERELLI.COM/ORVELLA

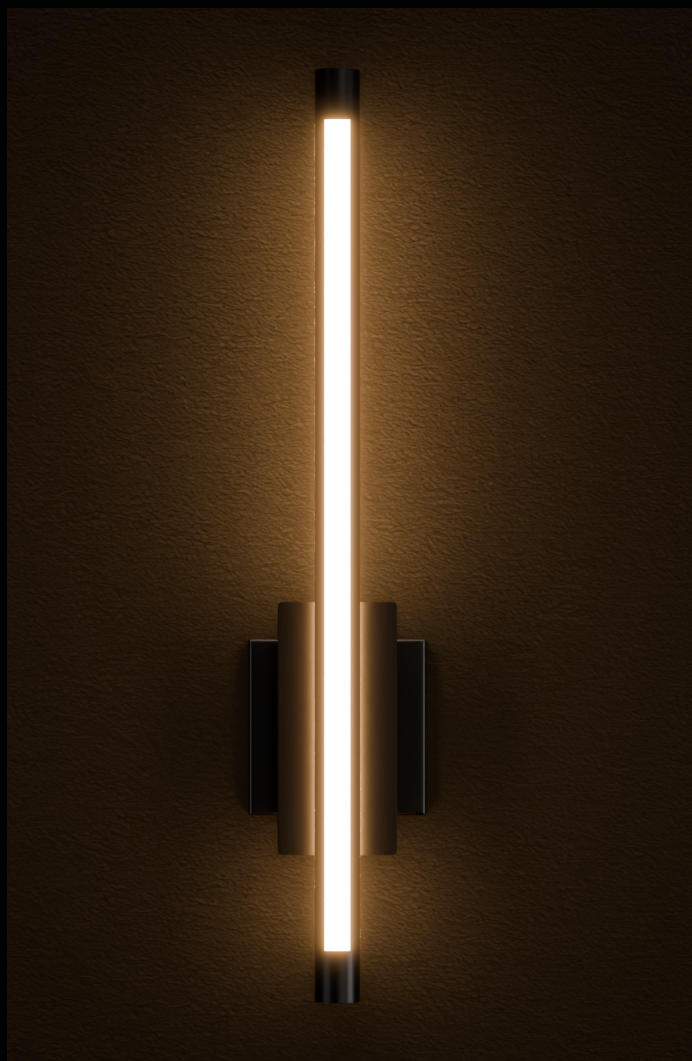

DORELLE 30



BY **berelli.**

An extended vertical LED wall sconce built around a continuous slim cylindrical light tube with refined end-cap detailing, centered on a stepped backplate. Scaled for taller architectural surfaces, it provides ambient illumination from a single architectural line. Specified for double-height entries, stairwell landings, hospitality corridors and gallery walls.

ORDER GUIDE:

DORELLE30-PF03-3000K-010V-IP20

Model:	DORELLE 30					
Finishes:	Explore available finish options through the Berelli Studio - berelli.com/studio					
Color Temperature:	2200K	2700K	3000K	3500K	4000K	5000K
Dimming: (Dim to 1%)	0-10V	Phase	Dali	ELV		
IP Rating:	IP20	IP65				
Voltage:	120-277 V					
Wattage:	30 Watts					
Lumen Output:	1900 Lumens					
Light Source:	LED					
CRI:	90+					
Weight:	1.2 kg					
Warranty:	5 years					

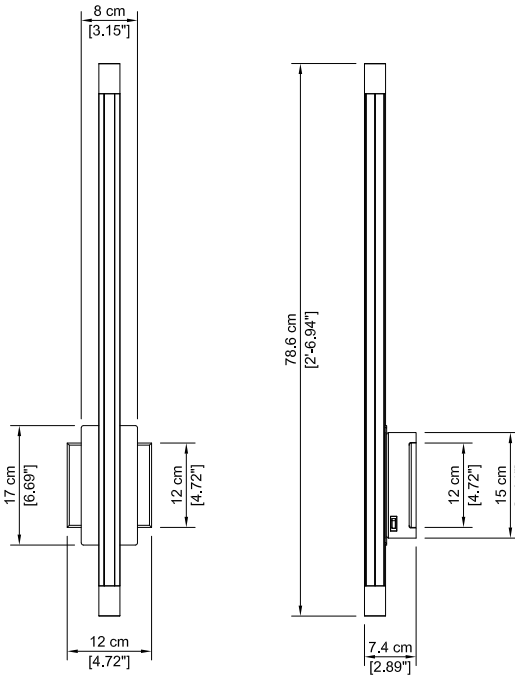

Custom options available upon request

Project:
Spec Type:
Notes:

berelli.

berelli.com

