

berelli.

berelli.com




KORE 24

BY berelli.

PART OF THE CONTOUR

ARCHITECTURAL COLLECTION

BERELLI.COM/CONTOUR

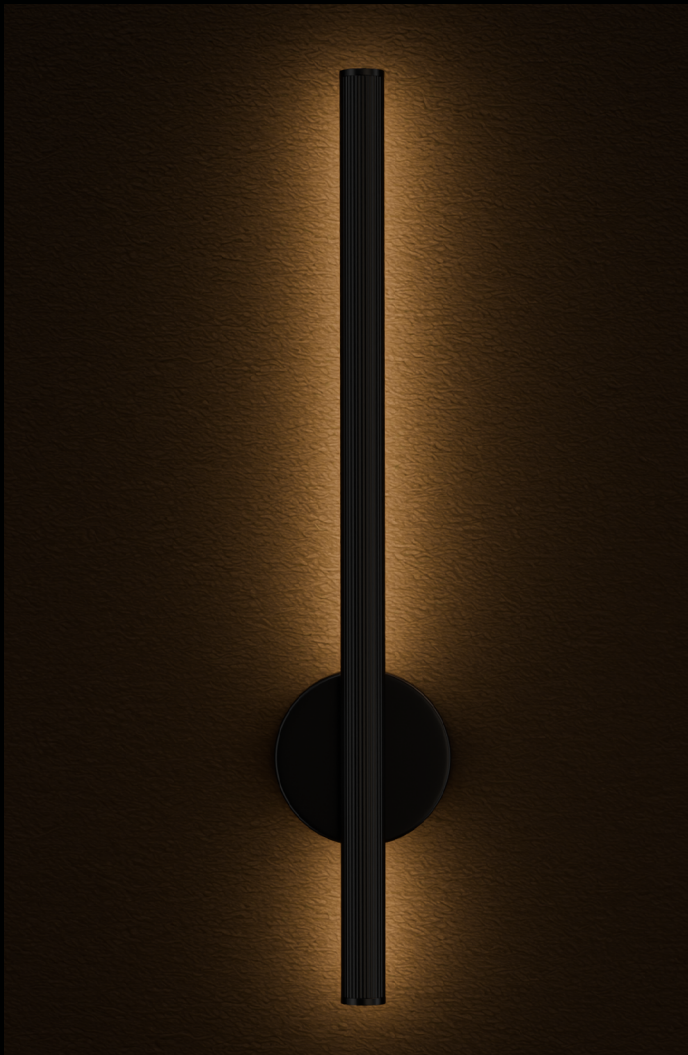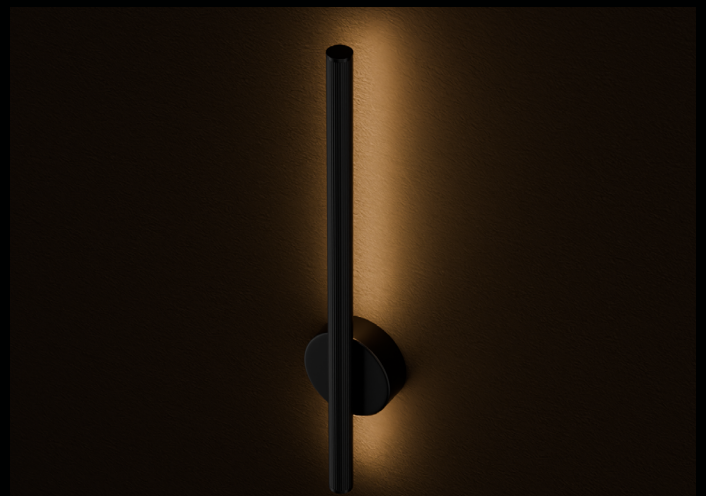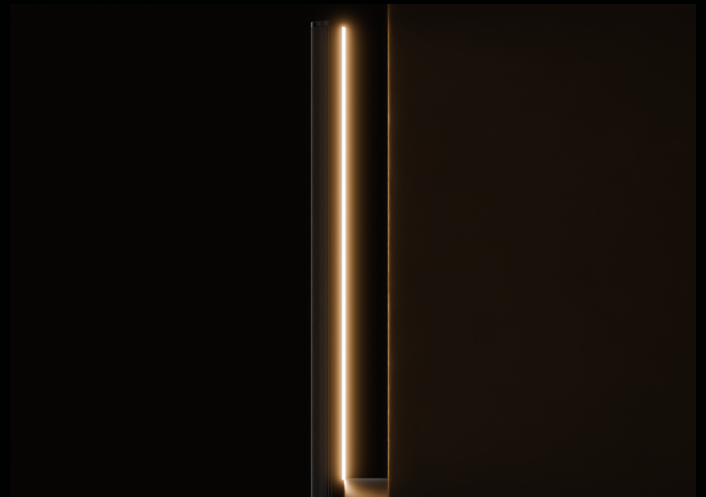

KORE 24


BY berelli.

A vertical linear LED wall sconce mounted on a discreet round plate, emitting balanced up-and-down illumination across the surrounding wall. Specified for residential corridors, hospitality guestrooms, gallery walls and powder rooms where a single vertical line of light is the preferred architectural gesture.

ORDER GUIDE:

KORE24-PF03-3000K-010V-IP20

Model:	KORE 24					
Finishes:	Explore available finish options through the Berelli Studio - berelli.com/studio					
Color Temperature:	2200K	2700K	3000K	3500K	4000K	5000K
Dimming: (Dim to 1%)	0-10V	Phase	Dali	ELV		
IP Rating:	IP20	IP65				
Voltage:	120-277 V					
Wattage:	9 Watts					
Lumen Output:	400 Lumens					
Light Source:	LED					
CRI:	90+					
Weight:	0.9 kg					
Warranty:	5 years					

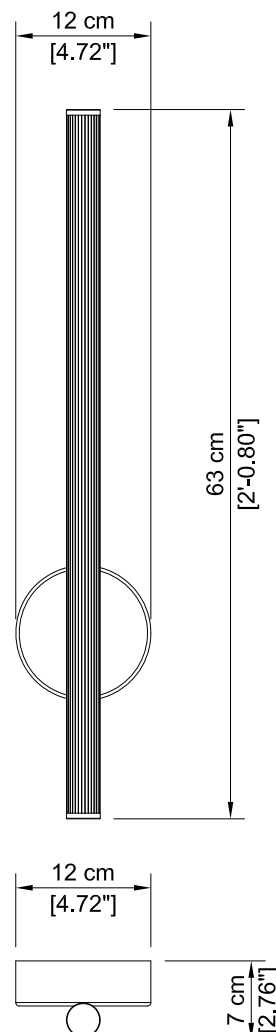

Custom options available upon request

Project:
Spec Type:
Notes:

berelli.

berelli.com

