

berelli.

berelli.com




KORE 32

BY berelli.

PART OF THE CONTOUR

ARCHITECTURAL COLLECTION

BERELLI.COM/CONTOUR

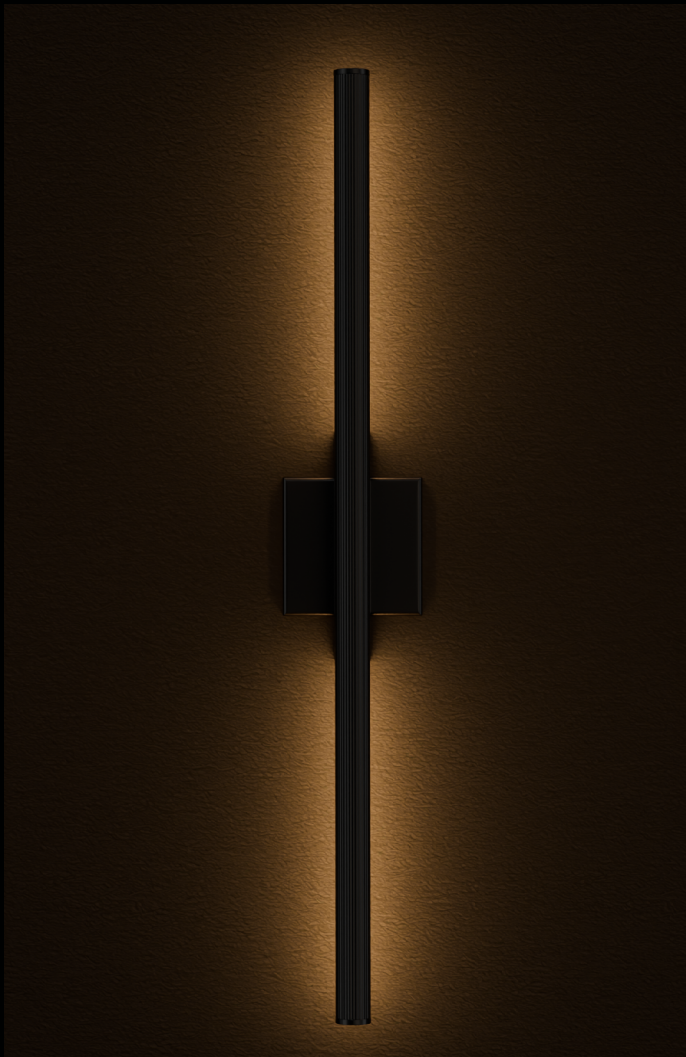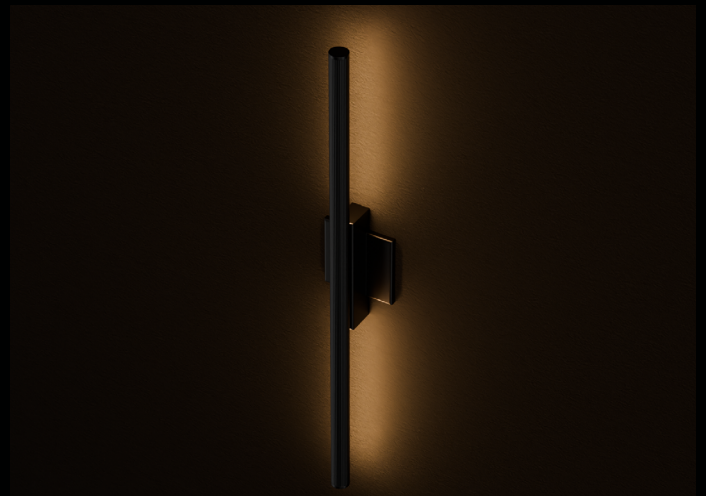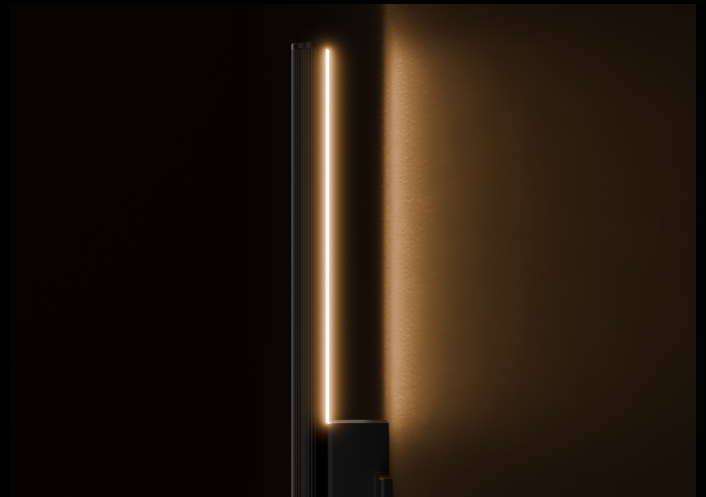

KORE 32


BY berelli.

A vertical linear LED wall sconce of slim profile, mounted to a centered round plate. The continuous luminous edge delivers an even vertical wash that reinforces architectural rhythm. Specified for corridors, residential entries, gallery walls and hospitality interiors where vertical proportion drives the design.

ORDER GUIDE:

KORE32-PF03-3000K-010V-IP20

Model:	KORE 32					
Finishes:	Explore available finish options through the Berelli Studio - berelli.com/studio					
Color Temperature:	2200K	2700K	3000K	3500K	4000K	5000K
Dimming: (Dim to 1%)	0-10V	Phase	Dali	ELV		
IP Rating:	IP20	IP65				
Voltage:	120-277 V					
Wattage:	11 Watts					
Lumen Output:	490 Lumens					
Light Source:	LED					
CRI:	90+					
Weight:	1.2 kg					
Warranty:	5 years					

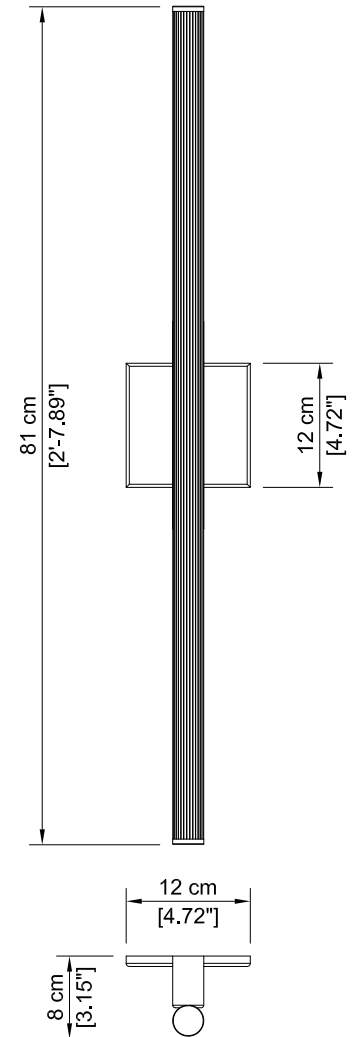

Custom options available upon request

Project:
Spec Type:
Notes:

berelli.

berelli.com

