

berelli.

berelli.com





PRAVA 24

BY berelli.

PART OF THE CONTOUR

ARCHITECTURAL COLLECTION

BERELLI.COM/CONTOUR

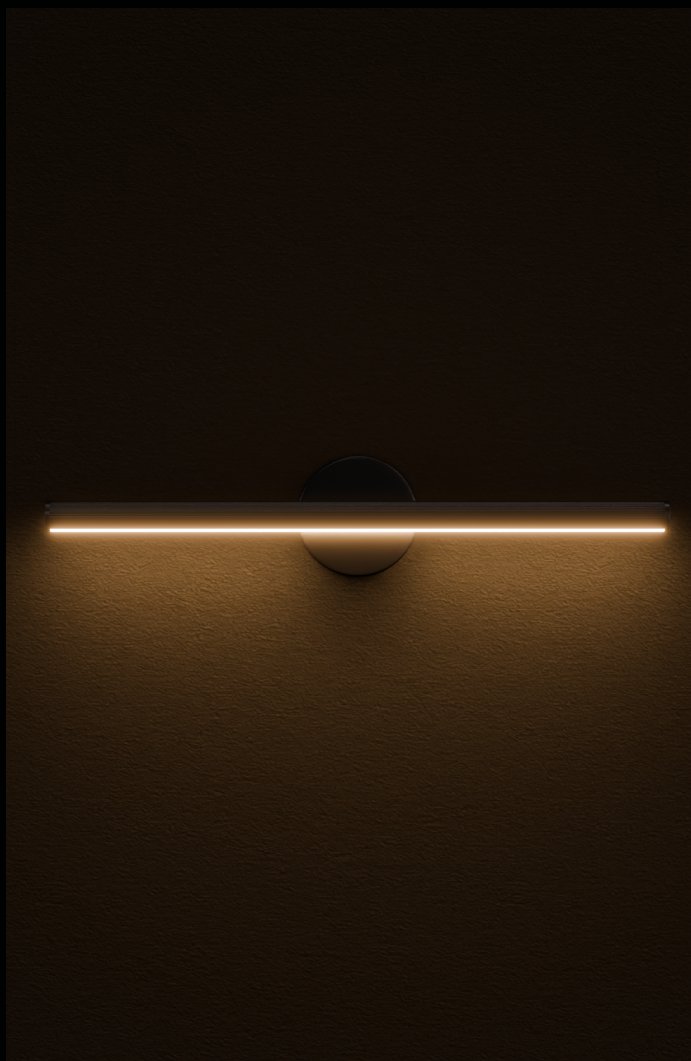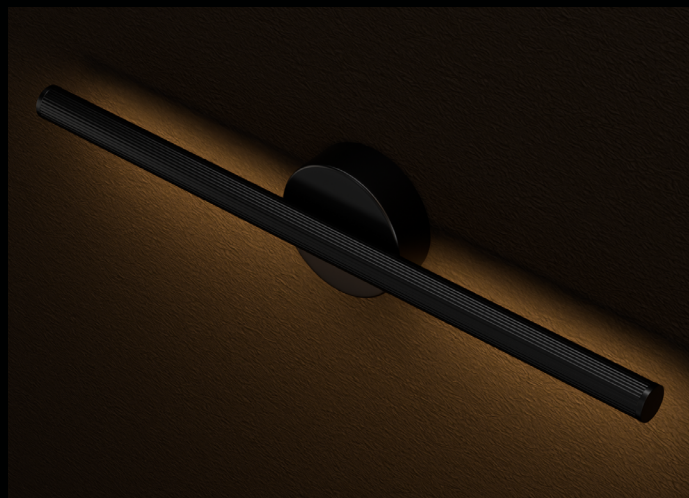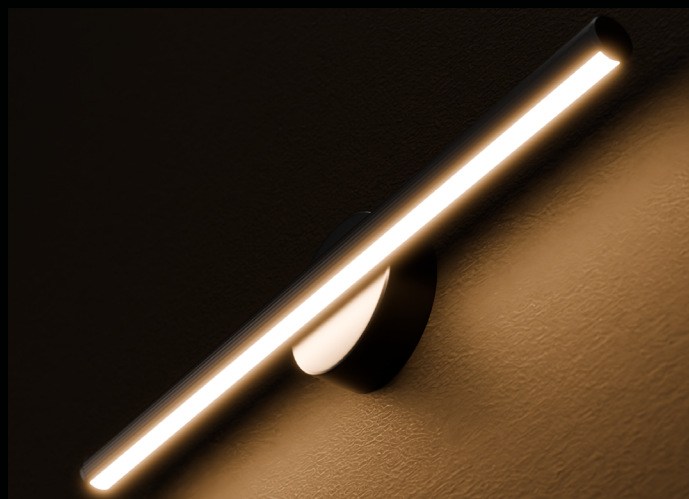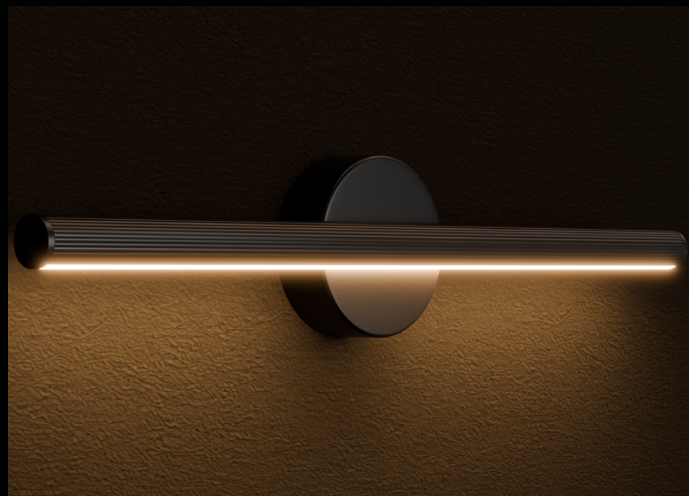

PRAVA 24



BY berelli.

A horizontal LED wall sconce composed of an extended slim bar centered on a round mounting plate, emitting an even horizontal wash on the surrounding wall. Specified for residential corridors, gallery walls, hotel hallways and restaurant booth banquettes where a defined horizontal line drives the design.

ORDER GUIDE:

PRAVA24-PF03-3000K-010V

Model:	PRAVA 24					
Finishes:	Explore available finish options through the Berelli Studio - berelli.com/studio					
Color Temperature:	2200K	2700K	3000K	3500K	4000K	5000K
Dimming: (Dim to 1%)	0-10V	Phase	Dali	ELV		
IP Rating:	IP20					
Voltage:	120-277 V					
Wattage:	11 Watts					
Lumen Output:	660 Lumens					
Light Source:	LED					
CRI:	90+					
Weight:	0.8 kg					
Warranty:	5 years					

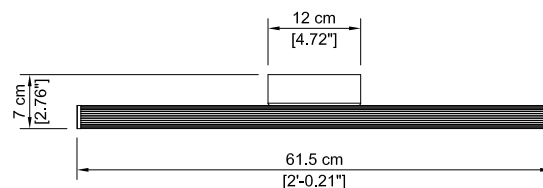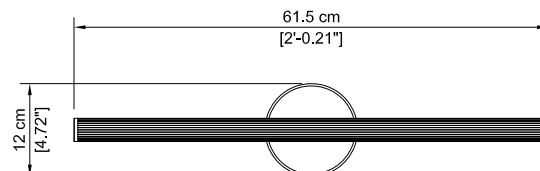

Custom options available upon request

Project:
Spec Type:
Notes:

berelli.

berelli.com

