

berelli.

berelli.com



ZENO 48

BY berelli.

PART OF THE CONTOUR

ARCHITECTURAL COLLECTION

BERELLI.COM/CONTOUR

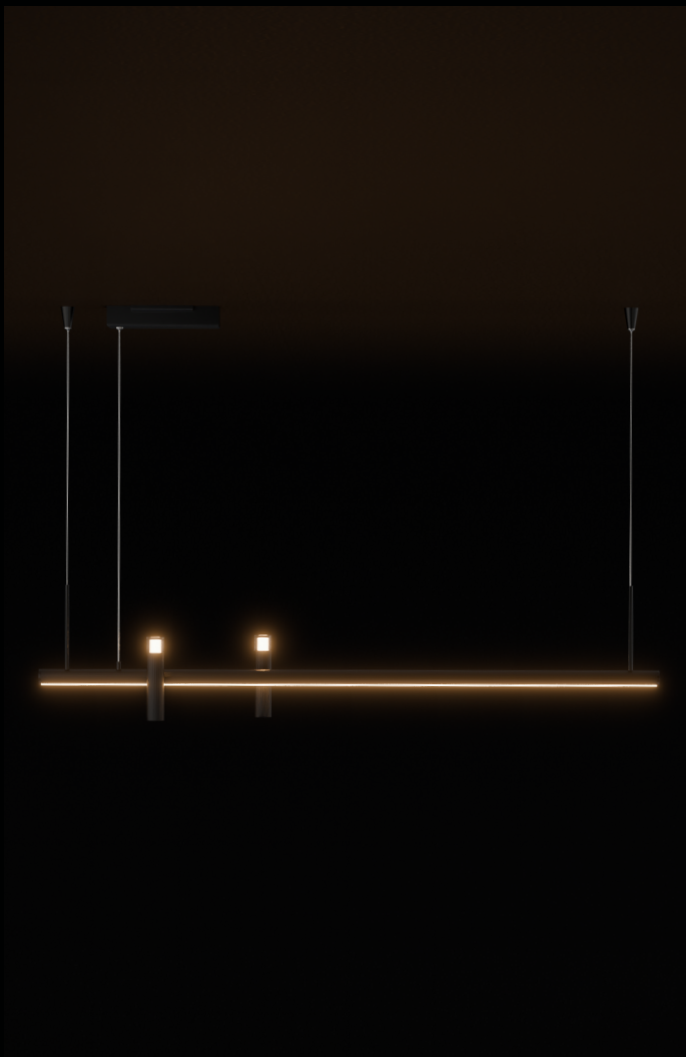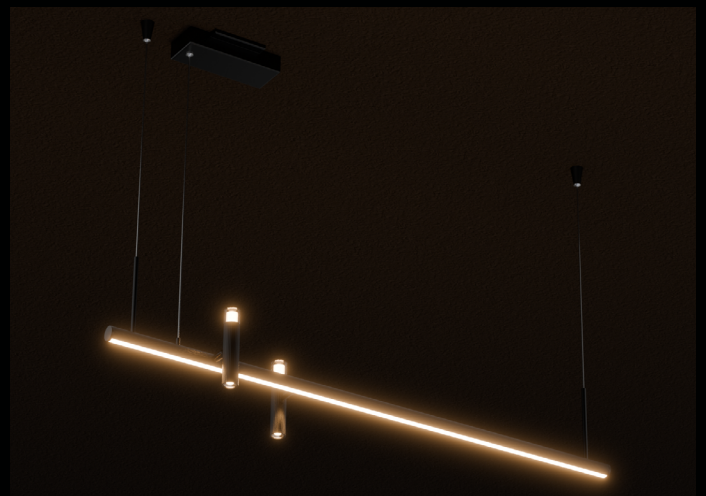

ZENO 48


BY berelli.

A linear LED pendant with an asymmetric form, pairing a slim horizontal light bar with a sculptural drop arm and integrated cylinder accent uplights set along its length. The composition reads as both functional ambient light and architectural statement, suited to open-plan offices, gallery-style residences, lobby spaces and hospitality lounges where balanced direct and indirect lighting and a strong horizontal line are required.

ORDER GUIDE:

ZENO48-PF03-3000K-010V

Model:	ZENO 48					
Finishes:	Explore available finish options through the Berelli Studio - berelli.com/studio					
Color Temperature:	2200K	2700K	3000K	3500K	4000K	5000K
Dimming: (Dim to 1%)	0-10V	Phase	Dali	ELV		
IP Rating:	IP20					
Voltage:	120-277 V					
Wattage:	28 Watts					
Lumen Output:	1500 Lumens					
Light Source:	LED					
CRI:	90+					
Weight:	2.2 kg					
Warranty:	5 years					

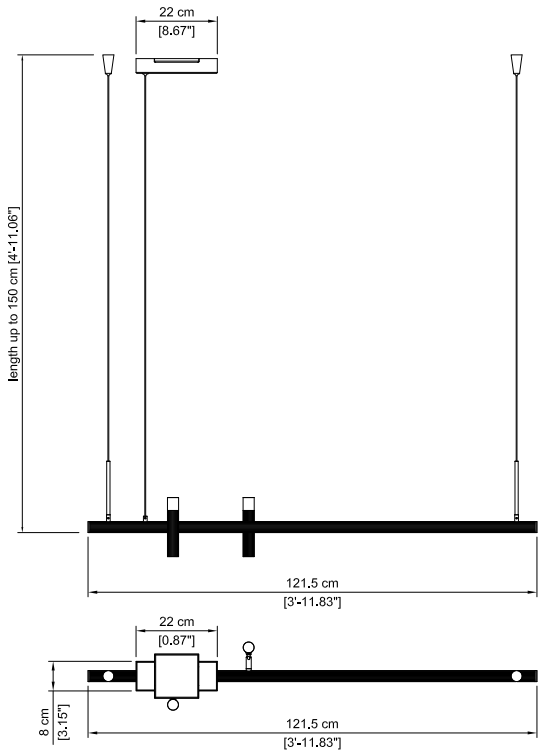

Custom options available upon request

Project:

Spec Type:

Notes:

berelli.

berelli.com

